


## Tan 150 Rough Top

Phone (503) 289-7720 Fax (503) 289-8920 Toll Free (800) 234-2358

**Application:** A deep impression top cover on the Rough Top Belt provides thousands of flexible gripping fingers to hold packaged products or units being carried up or down steep grades to a maximum of 35 degrees. Rough Top Belt is available with black or tan rubber covers on an all polyester fabric carcasses. The black top cover is recommended for utility type incline service while the tan cover is suggested for transporting packaged food products where an odorless, non-toxic, non-marking belt is a necessity.

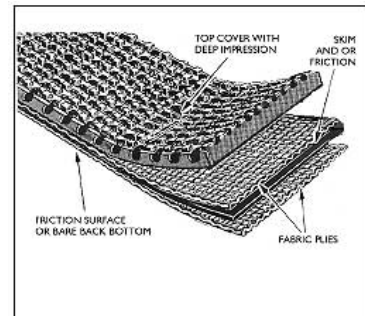

### Technical Data

	<b>Imperial</b>
<b>Working Tension</b>	150
<b>Number Of Plies</b>	2
<b>Fabric Type</b>	Synthetic
<b>Top Surface</b>	RT
<b>Bottom Surface</b>	Bare
<b>Overall Gauge</b>	9/32"
<b>Weight (Per Inch of Width)</b>	.101
<b>Minimum Rec. Pulley Diameters</b>	2"
<b>Working Temperature</b>	-40/250 F

### Splicing Methods

<b>FOF</b>	<b>Finger</b>	<b>Bias Stepped</b>	<b>Clipper *</b>	<b>Alligator *</b>	<b>Staple *</b>
NO	NO	YES	2	20	125

\* Fastener manufacturer should be consulted to review belt and application information.

No warranty, including implied warranty of merchantability, fitness for a particular purpose, or other warranty of quality is either expressed or implied of this product. The information on this specification sheet supercedes all previously printed material.